Technical data sheet

Vers.:02


echtermann® for professionals

Designation:	**TOP CLEAN pre-rinse** **High-performance automated pull mechanism** **Single-lever mixer tap** **with premium swivel spout (360°)**
Material:	**Stainless steel**
Article number.:	**301-102/250-295**




Technical data:

- Mixer tap: Single-lever mixer
- Nominal size 1/2"
- Operating pressure 1 - 6 bar (14.5 - 87 psi)
- For **high pressure only**
- Ceramic cartridge (mixer)
- Heat insulating handles
- Ergonomic hand shower made of stainless steel
- Premium swivel spout (360°) with projection A= 250mm Height= 295mm, lockable at the outlet
- Gas pressure spring
- Wall bracket, no visible thread (35mm to 165mm)
- Hose: High performance agraff hose, stainless steel, 850mm with ball joint and 360° rotatable
- Non-return valves prevent the circulation between hot and cold water as well as the backflow of dirty water
- Connection/Installation: Worktop bore hole Ø30mm
- Flow rate hand spray 2,4 - 4,8 l/min (1 - 4 bar, 14,5 - 58 psi)
- Flow rate swivel valve 15 - 27 l/min (1 - 4bar, 14,5 - 58 psi)
- Hot water resistant up to 80°C

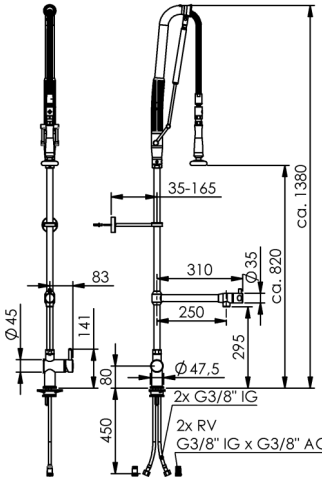



Description:

- **Automated pull mechanism:** The valve opens when the hand shower is pulled down and closes when it is moved up, supported by gas pressure spring = self-closing
- **Extended and free work area:** Hand-spray with ball joint, shower attachment swivels to both sides (360°)
- **Water saving:** Self-closing system
- **Durable and low-maintenance:** Opening mechanism above rising tube, hose and hand spray are never under water pressure
- **Work safety:** Controlled closing if spray gun slips off your hand
- **Concentrated water jet** for ideal pre-rinsing result



Flow rates:

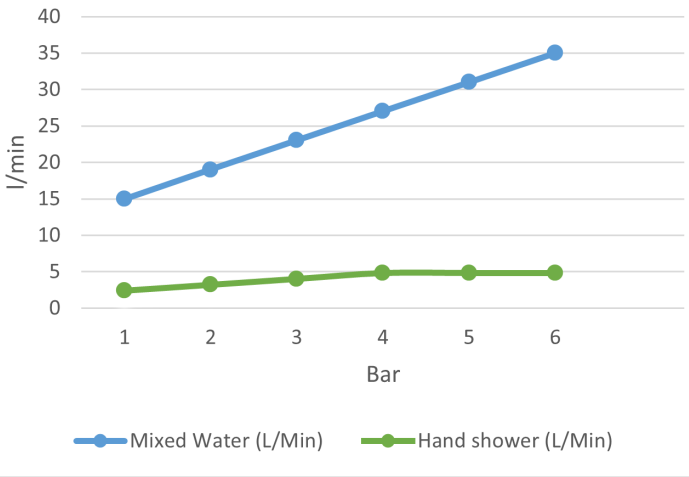

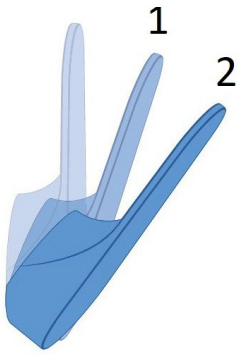

2-stage Eco-cartridge with water saving function

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products. No guarantee for errors and misprints

Proper use:	The fitting is used in commercial kitchens. The fitting must only be operated by trained specialist staff with a minimum age of 14 years. Assembly and disassembly may only be carried out by certified specialist tradesmen.	
Improper use:	The fitting is **not** suitable for connection to low-pressure hot water boilers. The fitting must not be used to clean push-through dishwashers. There is a risk of damage to the hose from excessive pulling.	
Warning:	In case of disassembly or repair the angle valves should be shut off. In order to prevent water damage, the mixer tap has to be closed outside business hours.	
Care instruction:	**Do not** use cleaning agents with a high chlorine or acid content. Refrain from using high -pressure cleaning devices, as defined in work sheet VdF 018, for instance. **No types** of scouring agents are to be used for cleaning purposes as they scratch the surface.	
Admissions:	**All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270. All solders are cadmium and lead free.**	
Manufacturer:	**Gebr. Echtermann GmbH & Co.KG** Bertholdstr.5 D 58644 Iserlohn Tel: +49 (0) 2371 / 9582-0 Fax: +49 (0) 2371 / 52787 Email: contact@echtermann.de	

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products. No guarantee for errors and misprints