
Designation:	**Double handle tap 3/4“** **with HU-spout + short pillar**
Materiel:	**Stainless steel**
Article number:	**225-101/250-490** **225-101/300-490** **225-101/350-490** **225-101/400-490** **225-101/450-490** **225-101/500-490**




Description:

- Mixer tap: Double handle tap
- Nominal size 3/4"
- Designed for high pressure only,
- Operating pressure 1-6 bar (14.5-87 psi)
- Heat insulating handle
- Swivelling HU-spout with JetSafe (drip stop)
- Projection A = 250 / 300 / 350 / 400 / 450 / 500 mm
- Height H = 490 mm
- Temperature and flow control with modern ceramic head-works with high flow rate
- Connection via 2x flexible connection hoses with connection thread IG 3/4“
- Easy-to-install fastening system with fastening nut and socket with G 1 1/4“ x 50 mm
- Worktop bore hole Ø43 mm
- Hot water resistant up to 80°C



Flow rate:

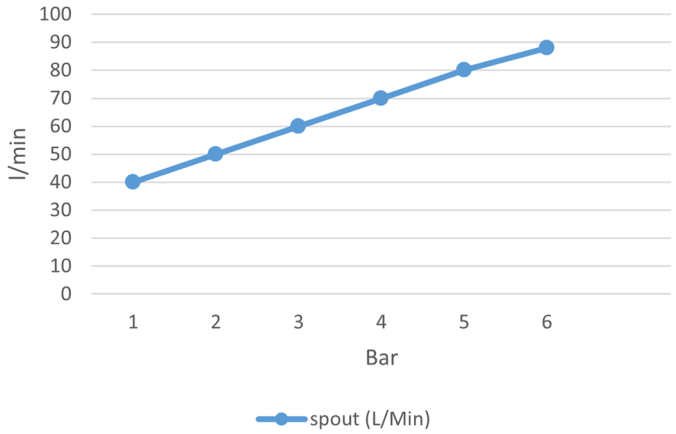

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products I No liability for errors and print errors

Proper use:	The pre rinse spray unit is used in commercial kitchens. The fitting must only be operated by trained specialist staff with a minimum age of 14 years. Assembly and disassembly may only be carried out by certified specialist tradesmen.	
Improper use:	The fitting is **not** suitable for connection to low-pressure hot water boilers. The fitting must not be used to clean push-through dishwashers. There is a risk of damage to the hose from excessive pulling.	
Hazard warning:	In case of disassembly or repair the angle valves should be shut off. In order to prevent water damage, the mixer tap has to be closed outside business hours.	
Care instruction:	**Do not** use cleaning agents with a high chlorine or acid content. Refrain from using high-pressure cleaning devices, as defined in work sheet VdF 018, for instance. **No types** of scouring agents are to be used for cleaning purposes as they scratch the surface.	
Admissions:	**All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270.**	
Manufacturer:	**Gebr. Echtermann GmbH & Co.KG** Bertholdstr.5 D 58644 Iserlohn Tel: +49 (0) 2371 / 9582-0 Fax: +49 (0) 2371 / 52787 Email: contact@echtermann.de	

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products I No liability for errors and print errors