
echtermann®
for professionals


Designation:	**Single-hole mixer tap 1/2“ with HU-spout**
Material:	**Stainless steel**
Article number:	**201-101/200-200** **201-101/250-200** **201-101/300-200** **201-101/350-200**



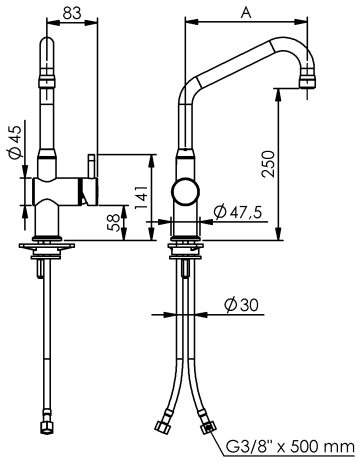



Description:

- Designed for high pressure only, operating pressure 1-6 bar
- Heat insulating handle, lateral
- Swivelling HU-spout with JetSafe (drip stop)
- Projection A = 200 / 250 / 300 / 350mm
- Height H = 200 mm
- Temperature and flow control with modern eco ceramic cartridge (2 stage water saving function)
- Flexible connection hoses 2 x 500 mm, union nut 3/8“
- Easy-to-install fastening system M8 x 140 mm for worktop thickness of up to approx. 50 mm
- Material **stainless steel**
- Hot water resistant up to 80°C

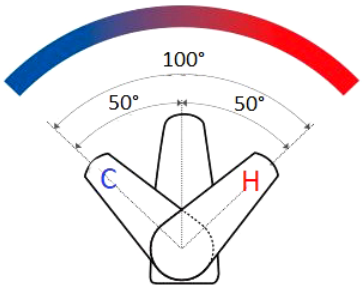

Flow rate:

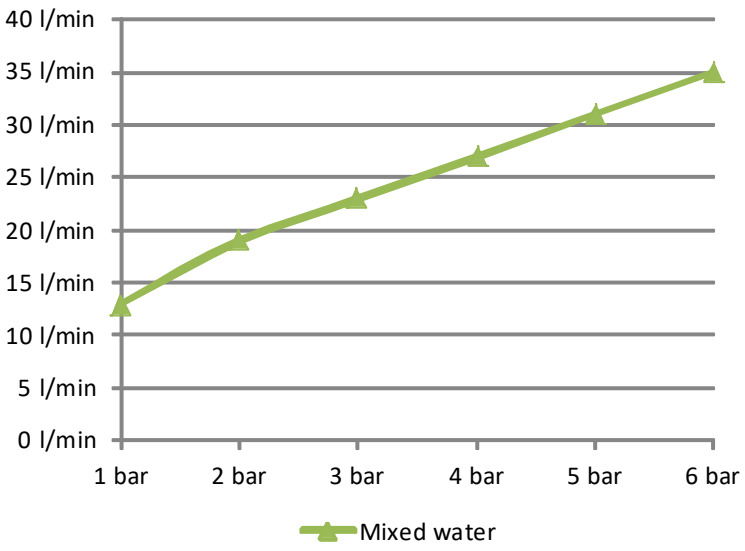

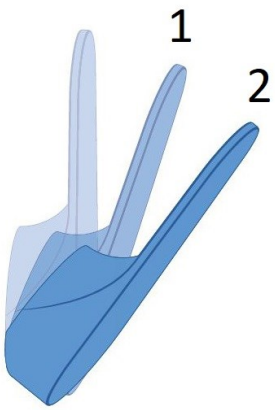

2 stage eco cartridge with water saving function

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products I No liability for errors and print errors

Proper use:	The pre rinse spray unit is used in commercial kitchens. The fitting must only be operated by trained specialist staff with a minimum age of 14 years. Assembly oder disassembly may only be carried out by certified specialist tradesmen.	
Improper use:	The fitting is **not** suitable for connection to low pressure hot water boilers. The fitting must not be used to clean push-through dishwashers. There is a risk of damage to the hose from excessive pulling.	
Hazard warning:	In case of disassembly or repair the angle valves should be shut off. In order to prevent water damage, the mixer tap has to be closed outside business hours.	
Care instruction:	**Do not** use cleaning agents with a high chlorine or acid content. Refrain from using high -pressure cleaning devices, as defined in work sheet VdF 018, for instance. **No types** of scouring agents are to be used for cleaning purposes as they scratch the surface.	
Admissions:	**All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270.**	
Manufacturer:	**Gebr. Echtermann GmbH & Co.KG** Bertholdstr.5 D 58644 Iserlohn Tel: +49 (0) 2371 / 9582-0 Fax: +49 (0) 2371 / 52787 Email: contact@echtermann.de	

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products I No liability for errors and print errors