

| | |
|---|---|
| Designation: | **Single-hole mixer tap 1/2“ with swivelling spout** |
| Material: | **Stainless steel** |
| Article number: | **201-105/220-200/01** (Short control lever)<br>**201-105/220-200/02** (Long control lever) |
| Description: | • Designed for high pressure only, operating pressure 1-6 bar<br>• 360° swivelling spout<br>• Heat insulating handle<br>• Projection A = 140mm<br>• Height H = 200 mm<br>• Flexible connection hoses M10x1 e.t. x union nut 1/2“<br>• Quick fastening system with 3x cylinder screws<br>• Material **stainless steel**<br>• Hot water resistant up to 80°C<br>• Worktop bore hole Ø43 mm<br>• Optionally increased flow rate by 35% possible by replacing the jet regulator |
| Flow rate: |  |


**201-105/220-200/01**




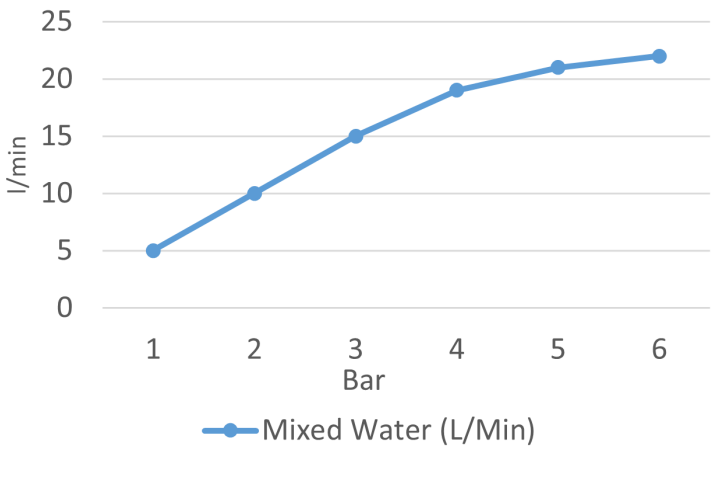


**201-105/220-200/02**

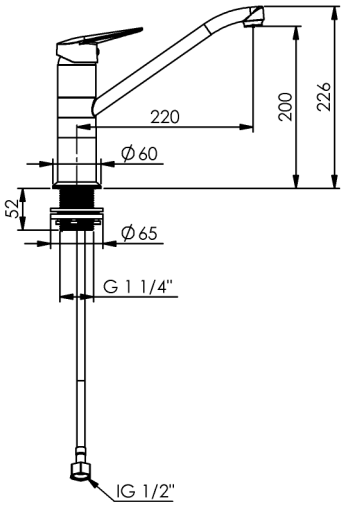

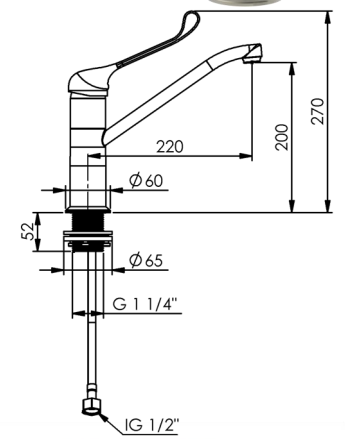

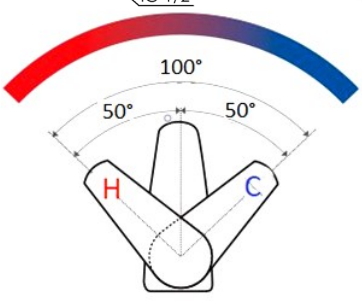
© by Gebr. Echtermann GmbH & Co.KG



We reserve the right to incorporate technical changes into our products I No liability for errors and print errors

| | | |
|---|---|---|
| Proper use: | The fitting is used in commercial kitchens. The fitting must only be operated by trained specialist staff with a minimum age of 14 years.<br>Assembly oder disassembly may only be carried out by certified specialist tradesmen. |  |
| Improper use: | The fitting is **not** suitable for connection to low pressure hot water boilers.<br>The fitting must not be used to clean push-through dishwashers. There is a risk of damage to the hose from excessive pulling. |  |
| Hazard warning: | In case of disassembly or repair the angle valves should be shut off.<br>In order to prevent water damage, the mixer tap has to be closed outside business hours. |  |
| Care instruction: | **Do not** use cleaning agents with a high chlorine or acid content. Refrain from using high -pressure cleaning devices, as defined in work sheet VdF 018, for instance.<br>**No types** of scouring agents are to be used for cleaning purposes as they scratch the surface. |  |
| Admissions: | **All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270.** |  |
| Manufacturer: | **Gebr. Echtermann GmbH & Co.KG**<br>Bertholdstraße 5<br>D 58644 Iserlohn<br>Tel: +49 (0) 2371 / 9582-0<br>Fax: +49 (0) 2371 / 52787<br>Email: contact@echtermann.de | |

© by Gebr. Echtermann GmbH & Co.KG



We reserve the right to incorporate technical changes into our products I No liability for errors and print errors