

echtermann®
for professionals

Designation:	**Single-hole mixer tap 1/2“ with swivelling spout**
Material:	**Stainless steel**
Article number:	**201-105/220-270/01** (Short control lever) **201-105/220-270/02** (Long control lever)
Description:	• Designed for high pressure only, operating pressure 1-6 bar • 360° swivelling spout • Heat insulating handle • Projection A = 220mm • Height H = 270 mm • Flexible connection hoses M10x1 e.t. x union nut 1/2“ • Quick fastening system with 3x cylinder screws • Material **stainless steel** • Hot water resistant up to 80°C • Worktop bore hole Ø43 mm • Optionally increased flow rate by 35% possible by replacing the jet regulator
Flow rate:	


201-105/220-270/01

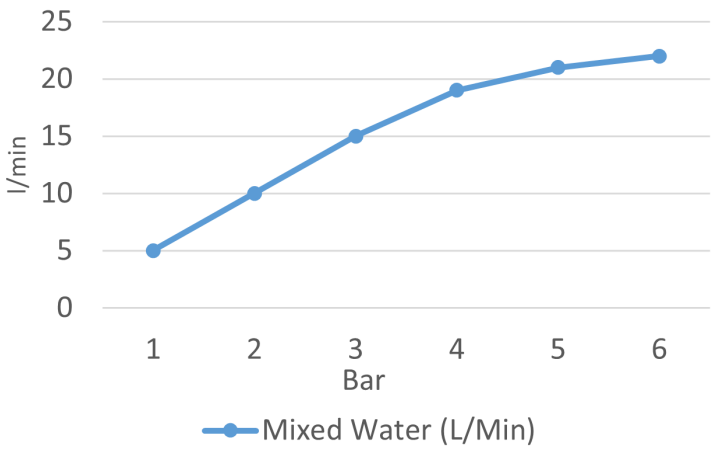


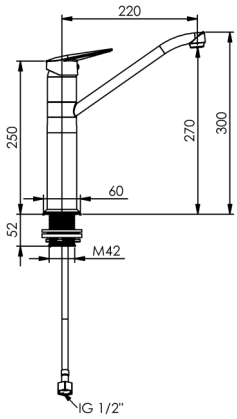

201-105/220-270/02



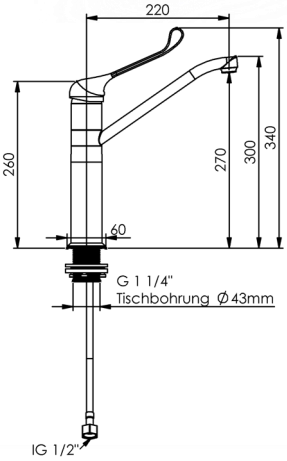

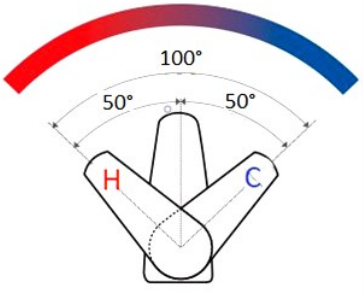

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products I No liability for errors and print errors

Proper use:	The fitting is used in commercial kitchens. The fitting must only be operated by trained specialist staff with a minimum age of 14 years. Assembly oder disassembly may only be carried out by certified specialist tradesmen.	
Improper use:	The fitting is **not** suitable for connection to low pressure hot water boilers. The fitting must not be used to clean push-through dishwashers. There is a risk of damage to the hose from excessive pulling.	
Hazard warning:	In case of disassembly or repair the angle valves should be shut off. In order to prevent water damage, the mixer tap has to be closed outside business hours.	
Care instruction:	**Do not** use cleaning agents with a high chlorine or acid content. Refrain from using high -pressure cleaning devices, as defined in work sheet VdF 018, for instance. **No types** of scouring agents are to be used for cleaning purposes as they scratch the surface.	
Admissions:	**All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270.**	
Manufacturer:	**Gebr. Echtermann GmbH & Co.KG** Bertholdstraße 5 D 58644 Iserlohn Tel: +49 (0) 2371 / 9582-0 Fax: +49 (0) 2371 / 52787 Email: contact@echtermann.de	

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products I No liability for errors and print errors