
Designation	**Sensor tap 1/2"** **Non-contact, electronic controlled basin mixer tap**
Material:	**Stainless steel**
Art.-No.:	**211-105/150-125/01EU** (Power supply EU) **211-105/150-125/01UK** (Power supply UK) **211-105/150-125/02** (Battery operation)
Description:	• Infrared sensors • Protection class: IP68 • Housing material stainless steel • Operating pressure 1 to 6 bar • Hot water resistant up to 80°C • Functionally reliable solenoid valve • After a 24-hour stagnation period, an automatic flush of 5 -seconds takes place • Manual control of the water flow and the water temperature • Sensor range approx. 14cm • Battery operation 2x CR123 (3V lithium battery) = 6V ***(Batteries not included in the scope of delivery)*** • Power supply operation (EU/UK) - 230W / 6V - Connection cable length 80cm - CE certified • Table bore Ø 33 - 35 mm • Panel thickness max. 45mm
Flow rate:	**ca.4.5l/Min (3bar)**



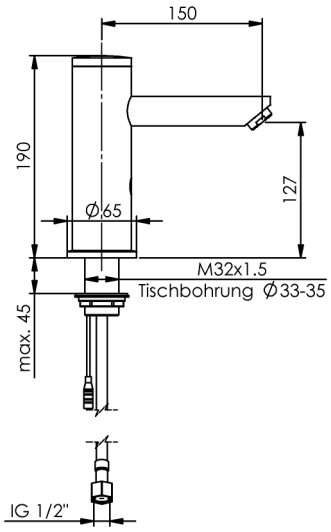

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products I No liability for errors and printing errors

Proper use:	The fitting must only be operated by trained specialist staff with a minimum age of 14 years. Assembly and disassembly may only be carried out by certified specialist tradesmen.
Improper use:	The fitting is **not** suitable for connection to low-pressure hot water boilers.
Hazard warning:	In case of disassembly or repair the angle valves should be shut off. Always unplug the power supply before maintaining the sensor tap. **Stagnation flush**: For safety reasons, the washbasin valve should not be completely closed, as otherwise a backflow with possible overflow of the basin could occur in the event of prolonged absence.
Care instruction:	**Do not** use cleaning agents with a high chlorine or acid content. Refrain from using high-pressure cleaning devices, as defined in work sheet VdF 018, for instance. **No types** of scouring agents are to be used for cleaning purposes as they scratch the surface.
Admissions:	**All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270.**
Manufacturer:	**Gebr. Echtermann GmbH & Co.KG** Bertholdstr.5 D 58644 Iserlohn Tel: +49 (0) 2371 / 9582-0 Fax: +49 (0) 2371 / 52787 Email: contact@echtermann.de

© by Gebr. Echtermann GmbH & Co.KG

We reserve the right to incorporate technical changes into our products I No liability for errors and printing errors